
Agriculture

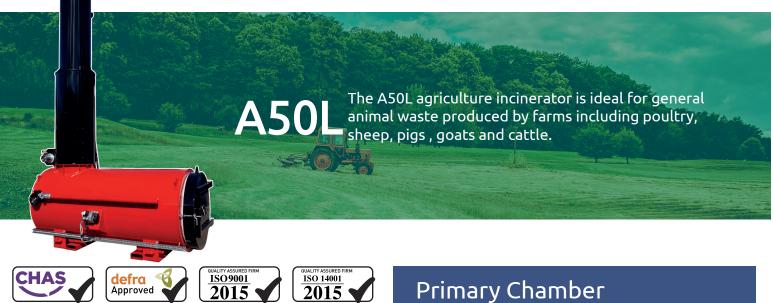

The A50L is a high capacity animal incinerator, designed to handle waste such as pigs, cattle, sheep, butchers waste and poultry. Having a front-loading design, enabling a safe and easy method for continuous loading of animals. Biosecurity is a growing concern for farmers across the globe, the implementation of an Addfield A50L can improve your ability to maintain a clean and safe environment for your livestock.

The following information details the many features, specifications and optional equipment associated with our A50L incinerator.

Machine Specification		
External L x W x H (mm)	5025 x 2050 x 3600/7200	
Internal L x W x H (mm)	3035 x 1170 Ø	
Chamber Volume (m³)	3.5	
Weight (approx tonnes)	8.6	
Max Load Capacity (kg)	1200	
Nominal Burn Rate UK* (kg/hr)	<50	
Burn Rate [Export Only]* (kg/hr)	100 - 150	
Thermal Capacity (kW)	770	
Power Supply 50/60 hz	210/240v	
Door Aperture	1170 Ø	
Control Panel	AI or PLC	
Fuel Types	Diesel, LPG, N-Gas	
Fire Brick (Alumina)	42.5%	
Insulation Fire Brick	Grade E23	

*We reserve the right to change the specification, dimensions and quality of materials from time to time, so long as the alteration is minor or an improvement to the said product.

Valmena Limited

- Fully insulated internal refractory lining, constructed from high grade refractory brick ensuring a self-supporting, interlocking arrangement.
- Fully interlocked, manually operated, access door.
- Waste ignition burner, temperature controlled on-off, complete with internal air fans.
- Combustion burner, temperature controlled on-off, complete with internal air fans.
- Secondary combustion burner air fans with automatically controlled distribution to their designated area.
- Two temperature sensor mounting points.

Secondary Chamber

- Fully insulated internal refractory lining, constructed from high grade refractory brick and low thermal mass insulation.
- Secondary chamber burnout burner, temperature controlled on-off, complete with internal air fans.
- Integrated combustion burner air fans with automatically controlled distribution to their designated area.
- All combustion fuel pipework.
- All electrical components.
- Temperature sensor mounting point at the top of the chamber, ensuring the chamber reaches the required 850°C minimum, with a 2 second retention time.

Recommended Waste Types

,		
Ý	Poultry & Chickens	\checkmark
P	Sheep & Lambs	\checkmark
(AND)	Pigs & Sows	\checkmark
TA	Goats	\checkmark
FF	Cows & Cattle	\checkmark





Agriculture



The A50L agriculture incinerator is ideal for general animal waste produced by farms including poultry, sheep, pigs, goats and cattle.

Waste Loading and De-Ashing

The A50L incinerator is designed for front loading only through the main access door. Due to the type of wastes they incinerate, bio-security measures should be in place on the site of the incinerator due to the possibility of spillage and spread of disease. At the end of every incineration process ash should be discharged through the loading door into a catcher tray prior to being loaded for the next burn.

The Addfield Difference

- Pre-fabricated 8mm & 10mm robust mild steel casing, seam welded and suitably stiffened/ braced where necessary.
- Lightweight resilient refractory fibre insulation lid, providing a tight seal, giving excellent thermal efficiency.
- Primary chamber lining thickness 160mm, rated upto 1450°C.
- Low thermal mass door lining, with removable roof and back plate for ease of maintenance.
- Paint finishing The steel structures are painted using a two-pack high grade paint system.
- With a choice of an AI or PLC Controller, customisable programs can cut your operations times.
- A 160mm thick refractory lining, using fire bricks and insulation bricks, improving thermal efficiency.

Additional Operation Equipment



Fuel Tank

Allowing you to operate the incinerator in all locations as well as providing a backup to your traditional supply. Available in 1000 to 5000 litre capacity. Fuel can be safely stored and monitored in close proximity to your incinerator.

Imena



Chute Loader

A top loading chute system aids the continuous loading of waste during operation. Ideal for use with a bucket loading tipper system.



Bin Tipper An Automatically bin tipper system provides hands free loading of hazardous waste.



Valmena Limited Akarnanias 3 | Limassol 3307 | Cyprus info@valmena.com | +357 25 318 522 | www.valmena.com

. Valmena Ltd.

All information should be used as a guide only, specifications are subject to change without notice

